

GJS-6013


Features

- Advanced internal structure design
- Easy to re-enter, it never requires re-entry tool it
- The closure is spacious enough for winding and storing fibers
- Fiber Optic Splice Trays(FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°
- The curved diameter meets with international standard
- Easy and fast to increase and reduce FOSTs
- Straight-through for uncutting and branching for cut
- Lay adapters suit for FTTH and easy to operate

Applications


- ◆ Suitable for bunchy & ribbon fibers
- ◆ Aerial, underground, wall-mounting, hand hole-mounting
- Pole-mounting and duct-mounting

Structural Drawing

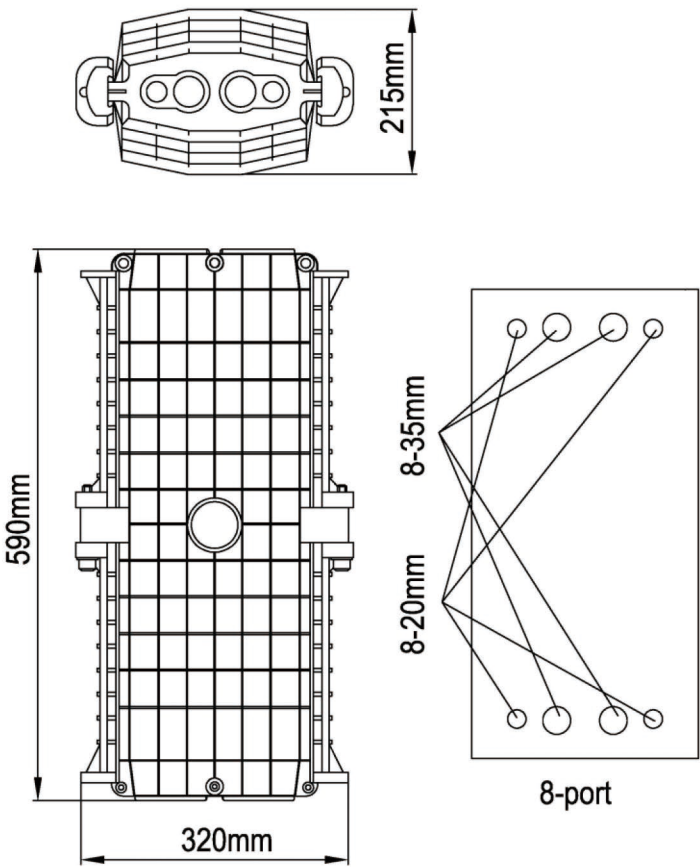

Ordering Information

Optical Splice Trays

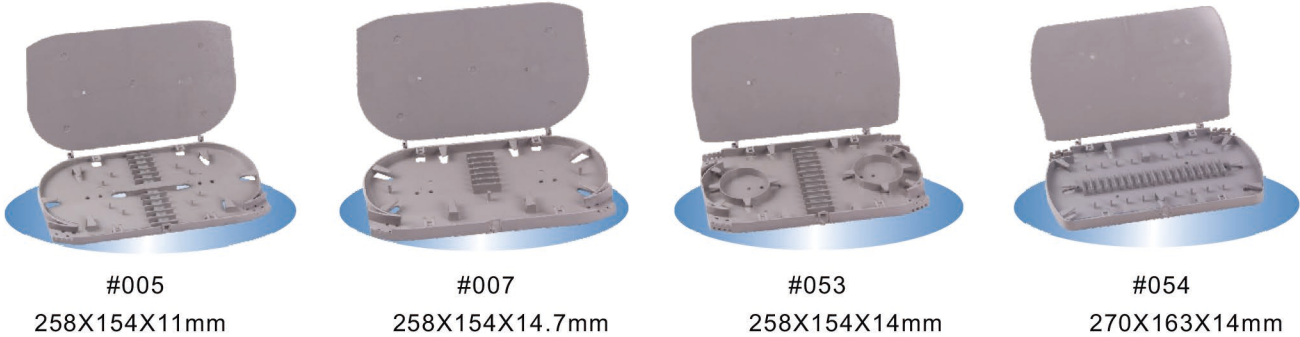

Type	Fibers/Tray	Max. Capacity	Tray#	Suitable Cable Dia. allowed(mm)
GJS-6013 I(Bunchy)	24-48F	432	005	4 round ports:20mm 4 round ports:35mm or: 4 round ports:20mm 4 round ports:26mm
GJS-6013 II(Bunchy)	36-72F	648	006	
GJS-6013III(Ribbon)	72F	504	007	
GJS-6013Iv(Ribbon)	144F	1008	053	
GJS-6013v(Ribbon)	216F	1512	054	

Accessories

Standard Accessories:

No.	Name	Quantity	
1	Seal tape	1 roll	
2	Insulation tape	1 roll	
3	Abrasive cloth	1 pc	
4	Earthing wire	1pc	
5	Nylon tie	1 set	
6	Labeling paper	1 pc	

No.	Name	Quantity	
7	Desiccant	2 bags	
8	measuring paper	1 pc	
9	Special wrench	1 pc	
10	Hexagon wrench and rubber hammer	3 pcs	
11	Hanging hook	1 set	
12	Heat shrinkable protective sleeve	1 bag	

Optional Accessories:

No.	Name	Quantity	
1	Pressure testing valve	1 pc	
2	Earthing deriving device	1 pc	
3	Buffer tube for bunchy fiber	1 roll	

No.	Name	Quantity	
4	Wall mounting bracket	1 set	
5	Buffer tube for ribbon fiber	1 roll	